

Blue Laser Diode Module **AML-L115-450001-01**

Φ 11.5mm 450nm Laser Line Generator

Features


1. AFC (auto power control) driver circuit
2. Wide input voltage range (3~ 6VDC)
3. Stable Output power of <1mW
4. High quality glass lens for output beam

Applications

1. General purpose blue laser light source
2. Industrial laser marker

Part No. Indications:

AML- L 115 - 450 001 - 01

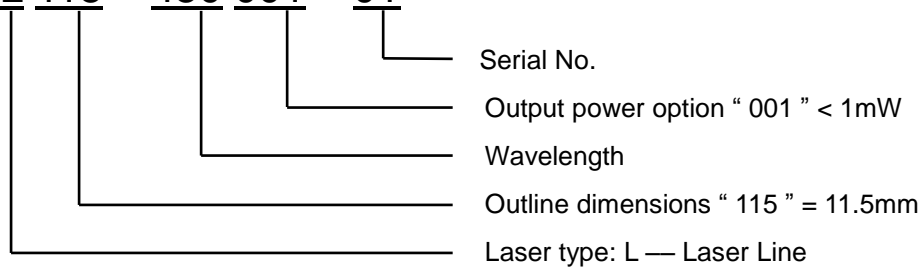

Absolute maximum ratings ($T_c=25^\circ\text{C}$)


Item	Symbol	Rating	Unit
Power supply voltage	V_{cc}	6	V
Laser Module optical output power	P_o	1	mW
Operation Case Temperature	T_c	0~60	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40~80	$^\circ\text{C}$

Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Item	Symbol	Min.	Typ.	Max	Unit	Condition
Wavelength	λ	440	450	460	nm	$P_o=1\text{mW}$
Output power	P_{out}	<1			mW	$V_{cc}=3\text{V}$
Operation current	I_{op}	-	130	200	mA	$P_o=1\text{mW}$ $V_{cc}=3\text{V}$
Operation voltage	V_{op}	3		6	Volt	
Laser line accuracy	< 0.01° (40") at 4m					
Emitting angle	> 120°					

Blue Laser Diode Module **AML-L115-450001-01**

Outline dimensions (Units: mm)

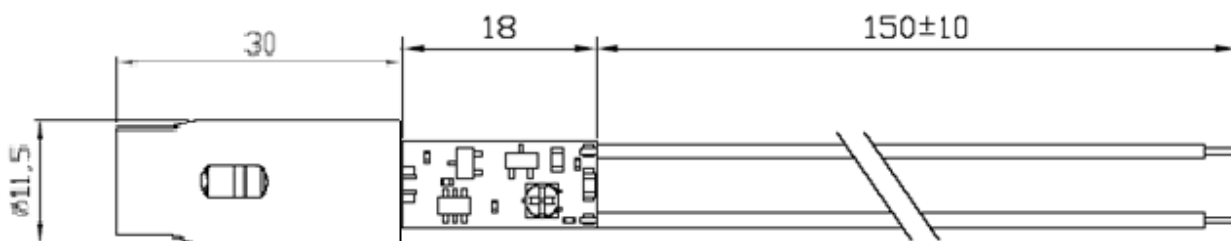

Red wire : Vcc

Black wire : GND

Laser Safety Precautions

1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of glass . Do not contaminate lens by soiling, oil or chemical.