

Infrared Laser Diode

ADL-80Q21NY

T6-2D-LD80-003_Rev.03

808nm 2W High Power Operation

Features


Highly reliable
Higher power

Applications

Pumping of solid-state lasers and fiber lasers
Industrial, measuring, scientific and medical systems
Applications in the printing industry
Defense and security

Absolute maximum ratings

| Parameter | Symbol | Condition | Rating | Unit |
|----------------------|----------|-----------|---------|------|
| Light output power | P_O | CW | 2.2 | W |
| Reverse voltage (LD) | V_{RL} | - | 2 | V |
| Case temperature | T_C | - | -10~+50 | °C |
| Storage temperature | T_S | - | -40~+85 | °C |

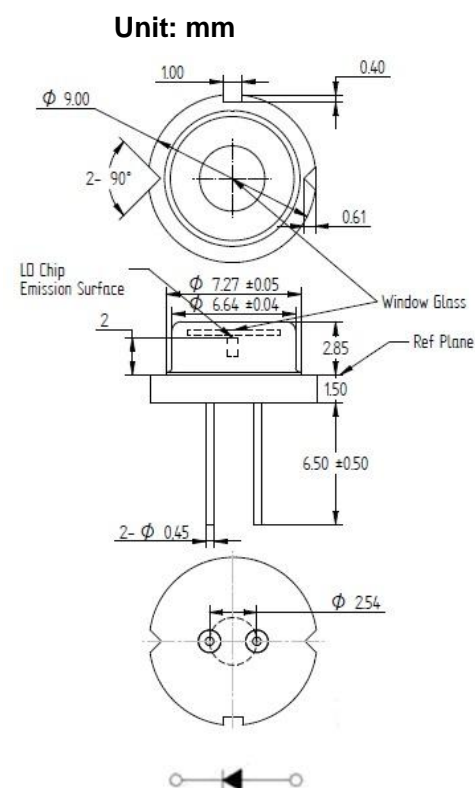

Electrical and optical characteristics ($T_c=25\text{ }^{\circ}\text{C}$)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------|------------------|------|------|------|-------|-------------------------------|
| Peak wavelength | λ | 798 | 808 | 818 | nm | $P_O=2\text{W}$ |
| Threshold current | I_{th} | - | 320 | 450 | mA | |
| Operating current | I_{op} | - | 2100 | 2800 | mA | |
| Operating voltage | V_{op} | - | 2.1 | 3 | V | |
| Differential efficiency | η | 0.7 | 1.1 | 1.4 | mW/mA | $P_O=0.9\text{--}2.2\text{W}$ |
| Parallel divergence angle | $\theta_{//}$ | - | 7 | 12 | deg. | $P_O=2\text{W}$ |
| Perpendicular divergence angle | θ_{\perp} | 30 | 35 | 40 | deg. | |

* Sufficient heat dissipation is required for CW operation.

● Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

Arima
LASERS






Infrared Laser Diode

ADL-80Q21NY

T6-2D-LD80-003_Rev.03

808nm 2W High Power Operation

* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

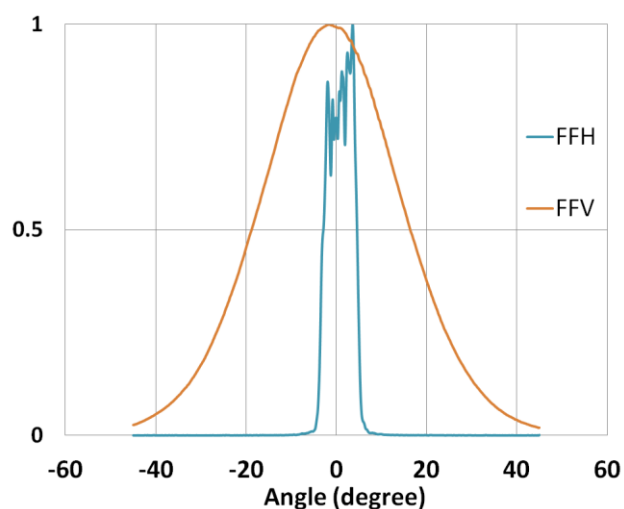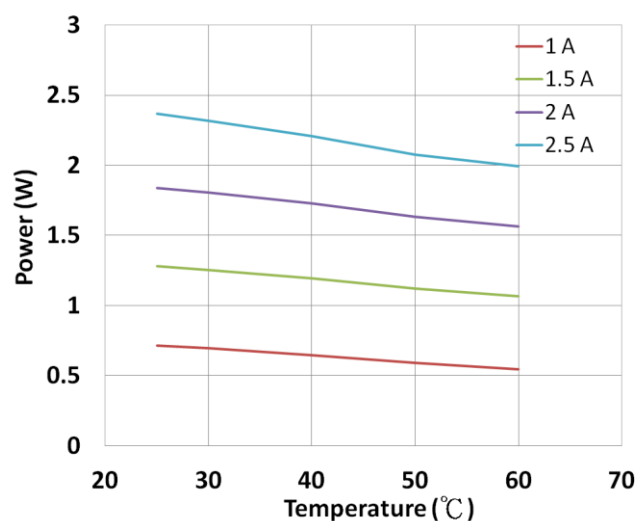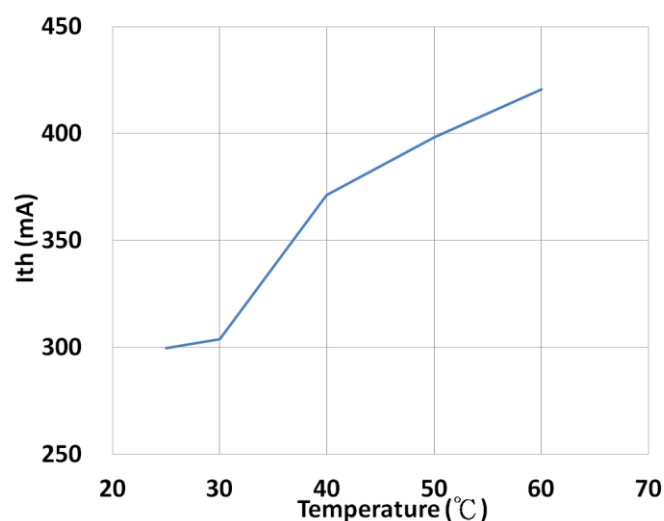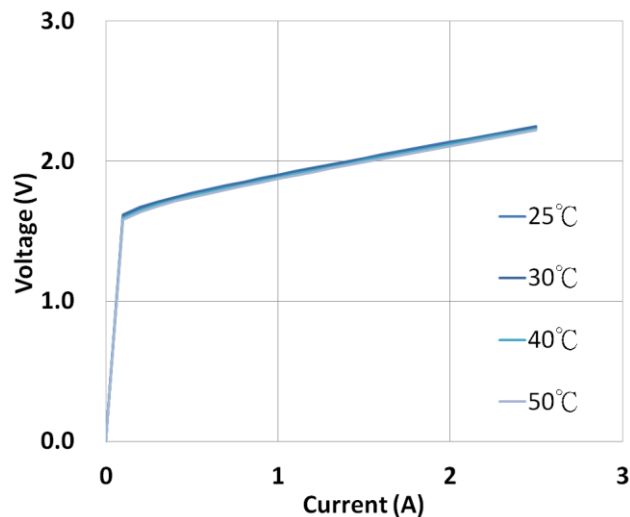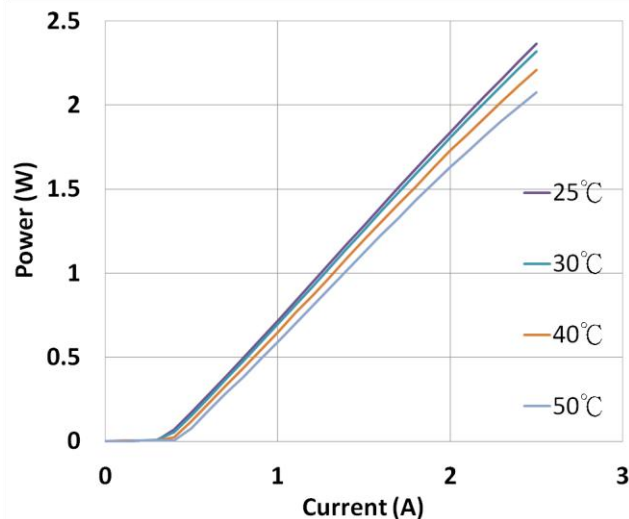

ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

Arima
LASERS