


## 940nm 200mW

### Features

- Compact volume
- High power conversion efficiency
- Open package


### Applications

- Moving sensor/Gesture
- Photoelectric sensors
- 3D sensing
- ToF applications

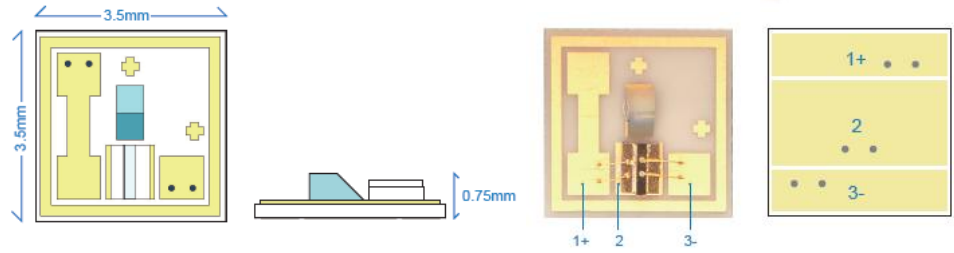

### Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Light Output Power	$P_o$	CW	220	mW
Reverse Voltage(LD)	$V_{RL}$	-	2	V
Case Temperature	TC	-	-10~60	°C
Storage Temperature	TS	-	-40~85	°C



### Electrical and Optical Characteristics(Tc=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Peak Wavelength	$\lambda$	930	940	945	nm	Po=200mW
Threshold Current	$I_{th}$		54	65	mA	
Operating Current	$I_{op}$	300	320	340	mA	Po=200mW
Operating Voltage	$V_{op}$		1.9	2.1	V	Po=200mW
Differential Efficiency	$\eta$	0.65	0.70	0.80	mW/mA	Po=100-200mW
Parallel Divergence Angle	$\theta_{//}$	4	7	13	deg.	Po=200mW
Perpendicular Divergence Angle	$\theta_{\perp}$	12	19	25	deg.	

- \* Sufficient heat dissipation is required for CW operation.
- \* The characteristics was tested under cw condition.
- \* Divergence angle measurement was based on FWHM

### ● Precautions

- \* Do not operate the device above maximum ratings even short period of time. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product

### ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

940nm 200mW

