

## 650nm 7mW 70°C Reliable Operation

### Features

High Output Power : 7mW CW

Small Package : Ø5.6mm

TE mode



Single Transverse/Longitudinal Mode

### Applications

Construction Tools

High Definition Laser Displays

Medical Applications

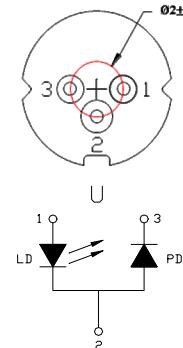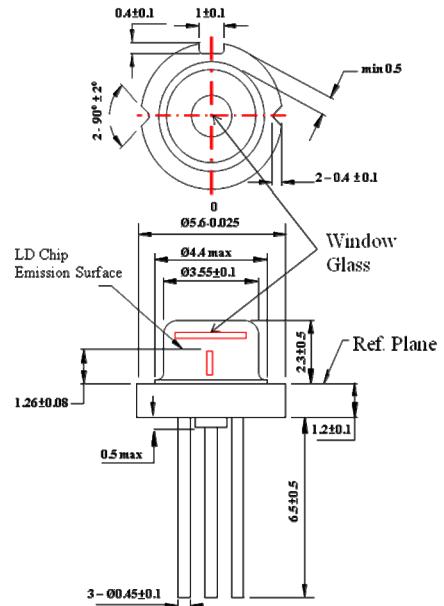

### Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P <sub>o</sub>	CW	10	mW
Reverse voltage (LD)	V <sub>RL</sub>	-	2	V
Case temperature	T <sub>c</sub>	-	-20~+70	°C
Storage temperature	T <sub>s</sub>	-	-40~+85	°C

### Electrical and optical characteristics (T<sub>c</sub>=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	645	655	660	nm	P <sub>o</sub> =7 mW
Threshold current	I <sub>th</sub>	-	18	25	mA	
Operating current	I <sub>op</sub>	-	26	30	mA	P <sub>o</sub> =7 mW
Operating voltage	V <sub>op</sub>	-	2.2	2.5	V	P <sub>o</sub> =7 mW
Differential efficiency	η	0.7	1.0	1.2	mW/mA	P <sub>o</sub> =3-5mW
Monitor current	I <sub>m</sub>	0.1	0.13	0.2	mA	P <sub>o</sub> =7mW
Parallel divergence angle	θ <sub>  </sub>	6	9	12	deg.	P <sub>o</sub> =7 mW
Perpendicular divergence angle	θ <sub>⊥</sub>	25	28	32	deg.	
Parallel FFP deviation angle	Δ θ <sub>  </sub>	-2	0	+2	deg.	
Perpendicular FFP deviation angle	Δ θ <sub>⊥</sub>	-2	0	+2	deg.	
Emission point accuracy	Δ xΔyΔz	-80	0	+80	um	

#### Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

**Arima**  
LASERS

## 650nm 7mW 70°C Reliable Operation

